

# Insulated Panel 32/1000 Profile




Insulated Panels are suitable for both roofing and cladding projects. Designed with a composite core and wide-spaced trapezoidal steel construction, the Insulated Panels offer optimal water drainage and strength performance.

Manufactured with a high-quality, pre-finished metallic coating and available in the popular Goosewing Grey colour, Panels are available in various lengths, from 2.5 metres up to 5 metres, to suit your project.

Insulated Panels boast a highly consistent insulation performance, with outstanding colour retention and corrosion resistance for longevity.

Each Panel can be installed down to a 4-degree pitch and provides a 1000mm standard width when lapped. Insulated Panels can be carefully cut at ground level using a jigsaw for small cut-outs and a circular saw with a fine-tooth blade for long straight cuts.

SPECIFICATIONS	
Applications	Wall or Roof (Vertical or Horizontal)
External Finish	Pre-finished metallic coating
External Face	32mm profile height, 333mm pitch centres
Standard Width	1000mm when lapped
Available Length	2.5m, 3m, 3.5m, 4m, 5m
Minimum Pitch	4 degrees
Thickness	40mm
Cutback	25mm
Thermal Performance	0.46 W/m <sup>2</sup> k (Test Standard EN 10211)
Fire Classification	B - s2 (Test Standard EN 13501-1)
Weight per Panel (kg)	24.75, 29.70, 34.65, 39.6, 49.5

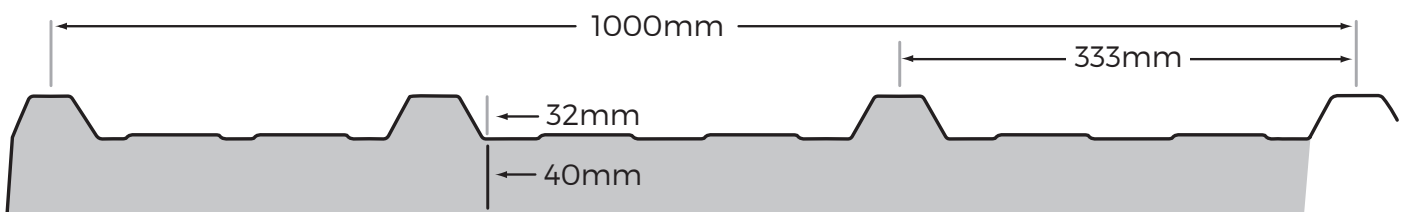

**PLEASE NOTE** - Extra care should be taken when handling the Insulated Panels and, where possible, manual handling should be avoided.



01837 659901 [info@cladco.co.uk](mailto:info@cladco.co.uk)  
[www.cladco.co.uk](http://www.cladco.co.uk)

Beardown Road, Exeter Road Industrial Estate, Okehampton EX20 1UA