

Nordic Ridge Flashing Galvanised




Ridge Flashings are used at the apex of the roof to join the two sides together. At Cladco, our Ridge Flashings are folded to a 135-degree internal angle and will flex 10-15 degrees either way, depending on the angle of your roof. Ridges are a major component in any profiled clad apex roof, and they will enhance the aesthetics of any building, especially in galvanised.

Cladco Galvanised Nordic Ridge Flashings are made in lengths of 3m and are available in plain Galvanised finish to match Galvanised Sheets.

Each Nordic Ridge has an internal angle of 135 degrees. Flashings include a 5mm safety welt on both sides to increase the strength and finish of the material. Coverage per wing is approximately 190mm.

Custom angles can be specified using our Custom-Made Flashings service. When installing these Flashings, allow a minimum overlap of 200mm from one Flashing piece to the next. We manufacture a variety of Flashing to customers' requirements in 3-metre lengths. Flashings can be fixed to the roofing sheets using 22mm Stitcher Screws.

Please note: Nordic Ridge Flashings give a 190mm x 190mm coverage due to 5mm safety welt.

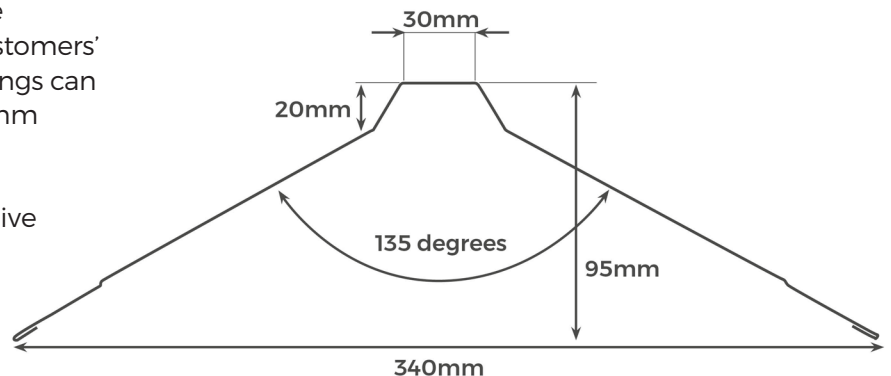

SPECIFICATIONS	
Length	3 metres
Sizes available	195mm x 195mm
Angle	135° internal angle
Overlap	Allow 200mm

PLEASE NOTE – Extra care should always be taken when handling metal sheets and flashings we advise using the correct type of Glove when handling or moving metal sheets and flashings.



01837 659901 info@cladco.co.uk
www.cladco.co.uk

Beardown Road, Exeter Road Industrial Estate, Okehampton EX20 1UA