


Insulated Panel 333 Profile

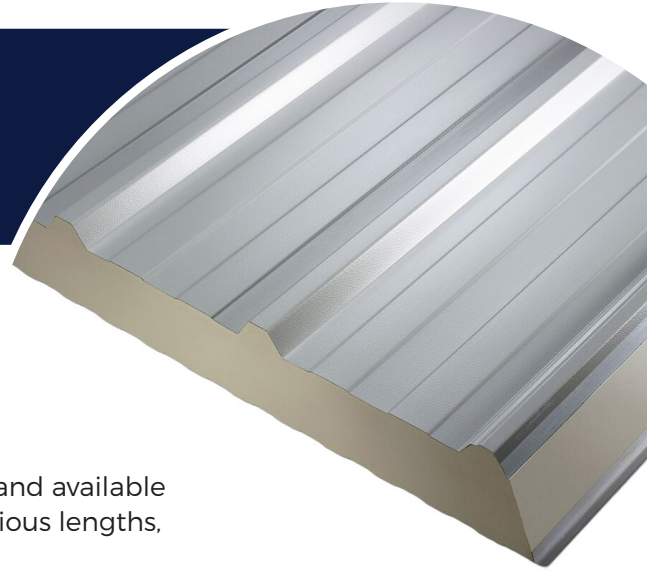


Insulated Panels are suitable for both roofing and cladding projects. Designed with a composite core and wide-spaced trapezoidal steel construction, the Insulated Panels offer optimal water drainage and strength performance.

Manufactured with a high-quality, pre-finished metallic coating and available in the popular Goosewing Grey colour, panels are available in various lengths, from 2.5 metres up to 5 metres, to suit your project.

Insulated Panels boast a highly consistent insulation performance, with outstanding colour retention and corrosion resistance for longevity.

Each Panel can be installed down to a 4-degree pitch and provides a 1000mm standard width when lapped. Insulated Panels can be carefully cut at ground level using a jigsaw for small cut-outs and a circular saw with a fine-tooth blade for long straight cuts.

SPECIFICATIONS	
Applications	Wall or Roof (Vertical or Horizontal)
External Finish	Pre-finished metallic coating
External Face	333 Profile, 32mm profile height, 333mm pitch centres
Standard Width	1000mm when lapped
Available Length	2.5m, 3m, 3.5m, 4m, 5m
Minimum Pitch	4 degrees
Thickness	40mm
Cutback	25mm
Weight per Panel (kg)	24.75, 29.70, 34.65, 39.6, 49.5

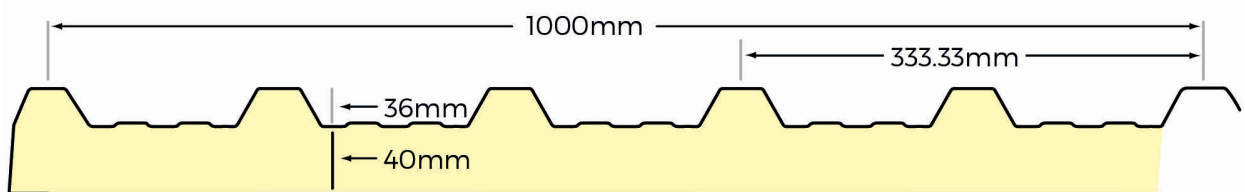

PLEASE NOTE - Extra care should be taken when handling the Insulated Panels and, where possible, manual handling should be avoided.