


Choice of Coatings: Polyester Paint




Polyester Paint coated sheeting is manufactured from a 25-micron thick, smooth enamel coated steel sheet, which is economic to use and gives excellent weather resistance. Typically 8 to 12 years to first maintenance or repaint, with a life in excess of 20 years in normal environments.

To produce high-quality, pre-coated sheeting, a system of multi-layered coatings are applied to a zinc coated, high-tensile steel strip and oven-cured to ensure optimum adhesion. This produces a Roofing Sheet with excellent corrosion resistance and climatic protection, together with abrasion resistance and high strength. We provide an extensive range of colours, where choice and aesthetic appeal can be matched to environmental and performance requirements.


Dripstop anti-condensation membrane is only available on Box Profile and Corrugated Profiles. Please contact us for further information.

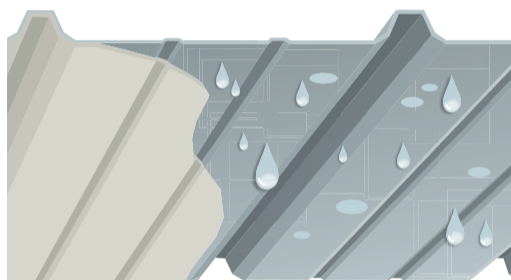

DRIPSTOP

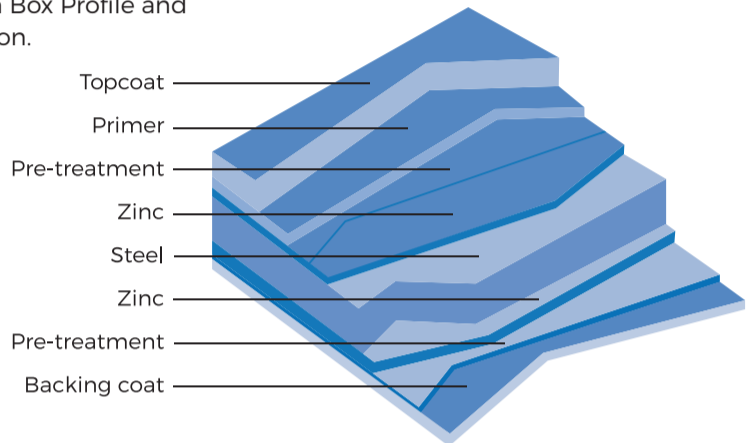

Polyester Paint Chart

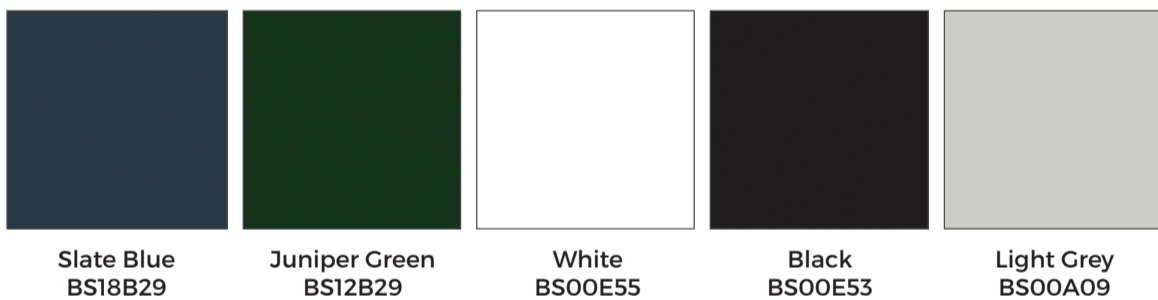

Polyester Paint colours are available in Slate Blue, Juniper Green, White, Black and Light Grey.

Please note: Colours are for guidance purposes only, actual colour may vary from image supplied. Numbers represent nearest BS/RAL reference. If you would like to see the physical colour before purchasing, please contact us for a swatch sample.

POLYESTER PAINT COATED

We manufacture Polyester Paint coated sheeting in:

- 34/1000 Box Profile**, which features a 34mm deep profile providing a 1000mm cover width, which can be used at a minimum roof pitch of 4°.
- 32/1000 Box Profile** with a 32mm deep profile, which gives 1000mm cover width and can be used at a minimum roof pitch of 4°.
- 3/13 Corrugated Profile** of 13 corrugations of 3 inches giving 990mm width cover which can be used at a minimum roof pitch of 10°.

QUALITY ASSURANCE

The steel substrate has a hot dipped galvanised coating of 275 grammes per square metre. The substrate is primed and coated with 25 microns of high-grade Polyester enamel

paint. The reverse/internal surface is galvanised and coated with a standard alkali grey wash coat.

HEAT RESISTANCE

Maximum continuous temperature range is -40°C to +80°C.

TOLERANCES

All dimensions are subject to roll forming tolerances.

THICKNESS

Polyester Paint coated sheeting is available in 0.5mm and 0.7mm thicknesses.

COLOURS

Polyester Paint coated sheeting is available in five colours: Juniper Green, Slate Blue, White, Black and Light Grey.

STORAGE & HANDLING

For advice on storage and handling, please consult the Installation section on our website.

TYPICAL APPLICATIONS

Sheds, stables, garden rooms, homes, building projects, side cladding, partitioning, and many more applications.



Order online at www.cladco.co.uk
Call us on 01837 659901

CLADCO
ROOFING