

2.5M CORNER TRIM COMPOSITE SLATTED CLADDING



Cladco composite corner trims are designed to finish and protect the edges of your slatted wall cladding panels, ensuring a neat and professional installation. Available in matching colours, these L-shaped trims seamlessly cover and seal the exposed ends of Cladco panels, enhancing the overall appearance and durability of your project.

COLOUR RANGE




TRIM SPECIFICATIONS

SKU	(Walnut) WPCSLATCW (Teak) WPCSLATCT (Stone Grey) WPCSLATCS (Coffee) WPCSLATCC (Charcoal) WPCSLATCB (Silver Grey) WPCSLATCSG
Length	2.5m
Width	43mm x 43mm
Thickness	7mm
Finish	Smooth
Weight	1.75kg


TEST CERTIFICATIONS

FSC® Certification

SA-COC-005542

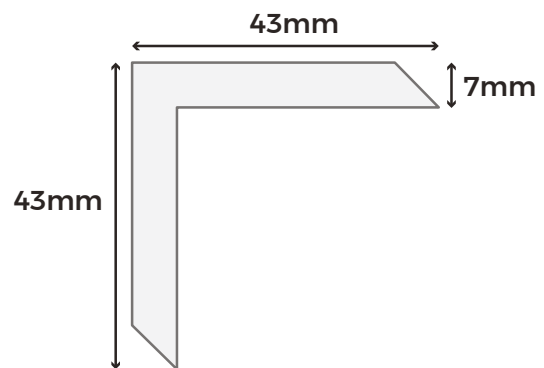

Please Note: Images are for illustration purposes only. Actual products may vary slightly from those shown.

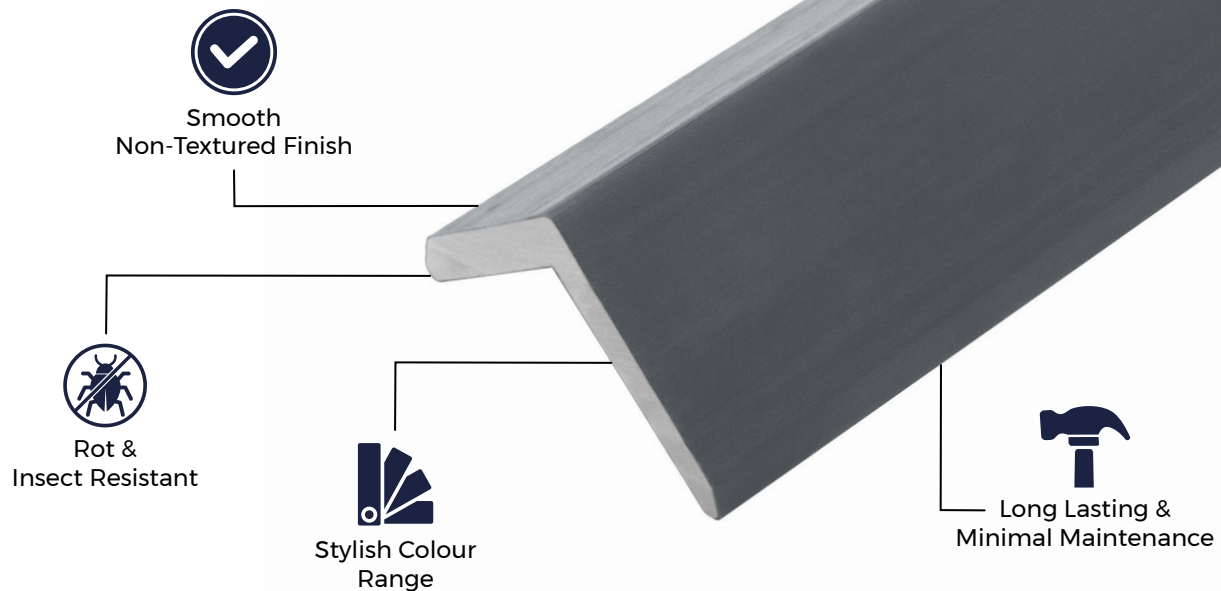

MATERIALS

Constructed from 60% hardwood fibres and 40% recycled plastics, this capped wood-plastic blend offers a robust and sustainable finish.



SURFACES

The corner trims feature a plain, smooth surface, providing a clean and modern aesthetic.



ACCESSORIES

Available accessories include composite slatted wall cladding panels, internal corner profile trim, external corner trim, start profile trim, and double-end profile trims for a complete and seamless installation.



LOW MAINTENANCE

Corner trims feature a low-maintenance, rot-resistant construction, making them durable and easy to work with for a seamless cladding installation.



INSTALLATION

Corner trims are installed under the battens at the base or top of the installation, effectively concealing exposed corners or edges for a neat and professional finish.

GENERAL CLEANING

For everyday debris such as leaves, berries, plants, and animal droppings, simply clear the surface with a brush. Regular maintenance is recommended to keep your cladding clean and in the best condition.

To clean, mix a light detergent with lukewarm water and use a soft cloth or brush to gently remove dirt and buildup from the cladding panels.

NATURAL WEATHERING

Cladco external wall cladding is designed with an encapsulated, non-porous outer layer, providing protection against weathering, water, and UV damage. Over time, some natural weathering may occur, depending on location and sunlight exposure. This process is normal and part of the material's natural character, ensuring long-term durability and performance. This is a normal process and part of the natural character of the material.



RECYCLED MATERIALS & SUSTAINABILITY

Cladco capped composite corner trims are manufactured using recycled materials, reducing our impact on the environment. A mix of 60% recycled hardwood fibres and 40% recycled, post-consumer plastics provides each Panel with low-maintenance and long-lasting benefits. Additional bonding agents are used to bind the materials to create a durable composite core, which is capped in a hard-wearing outer layer.

All Cladco composite products are available as FSC® certified for the same cost. If you require FSC® certified products, please ask for these when placing your order.

CORNER TRIM INSTALLATION ADVICE


For a neat and professional finish, corner trims can be installed at the top or bottom of your slatted cladding project to conceal hollow ends and prevent water pooling. **Important:** If installing corner trims at the bottom, it is also advisable to install them at the top to prevent water from becoming trapped in the channels. Installation Steps: Measure the area to be covered and cut the corner trim to size. Pre-drill the trim at appropriate intervals for secure fixing. Fix the trim every 300mm along its length using suitable screws. When joining two trim ends, leave a minimum 2mm gap between them to allow for natural expansion. Following these steps ensures a secure and durable installation while maintaining the functionality and longevity of your slatted cladding system.

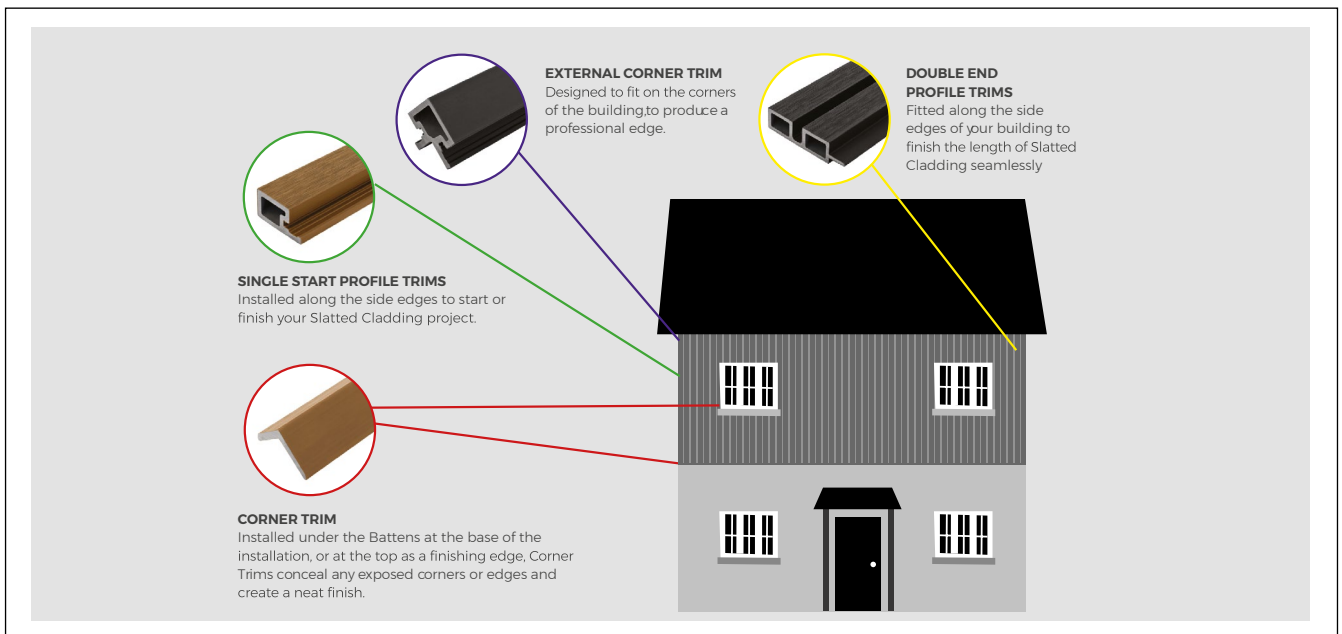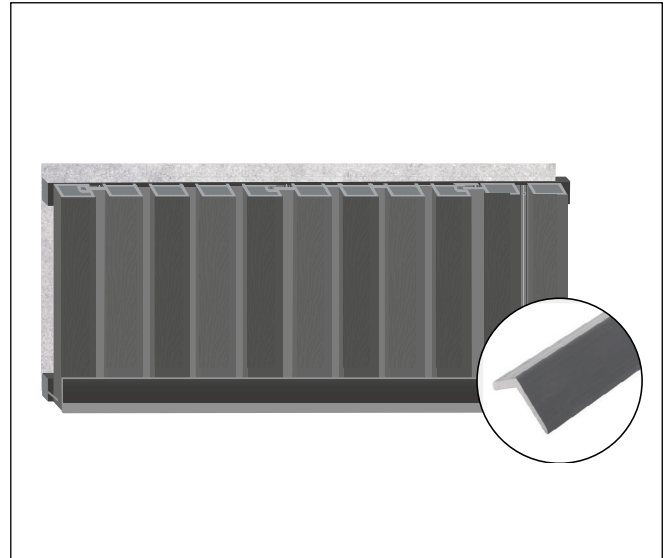

Adhering to these guidelines will ensure the proper installation and longevity of your slatted cladding project. Failure to follow these guidelines may void the product warranty.

For full installation details, please refer to our external slatted cladding installation guide.

PRODUCT ACCESSORIES

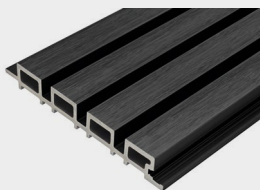

2.5M COMPOSITE
SLATTED CLADDING




SINGLE
START TRIM



DOUBLE
END TRIM



EXTERNAL
CORNER TRIM

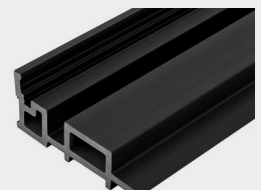

INTERNAL
CORNER TRIM



www.cladco.co.uk
T: 01837 659901 E: info@cladco.co.uk

CLADCO
PROFILES