CLADCO PROFILES

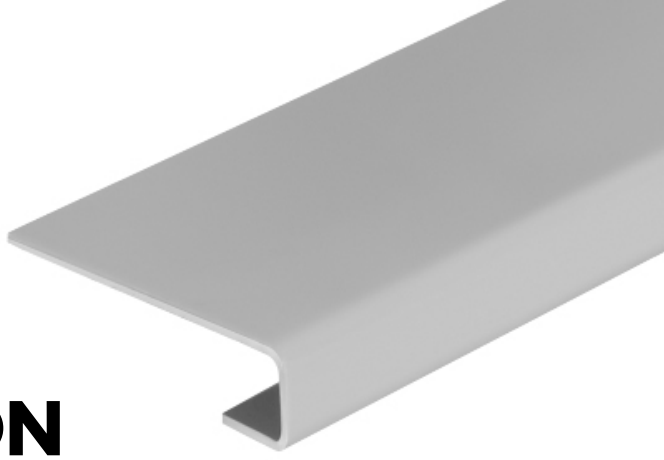

3M SINGLE BOARD CONNECTION PROFILE TRIM

FIBRE CEMENT LAP RANGE

Designed for holding single fibre cement lap boards inside the reveal, instead of multiple boards in a feather board effect, single board connection trims will provide a professional finish for your fibre cement lap wall cladding project.

COLOUR RANGE

BLACK	BLUE	LIGHT GREY	CREAM
SLATE	GRANITE	WHITE	SAGE GREEN

TRIM SPECIFICATIONS

SKU	(Black) FCTRIMSBBL-P (Blue) FCTRIMSBBG-P (Light Grey) FCTRIMSBWG-P (Cream) FCTRIMSBCW-P (Slate) FCTRIMSBSG-P (Granite) FCTRIMSBPE-P (White) FCTRIMSBWH-P (Sage Green) FCTRIMSBGG-P
Length	3m
Measurements	45mm x 10mm x 8mm
Thickness	1mm
Weight	1.53kg (approx.)

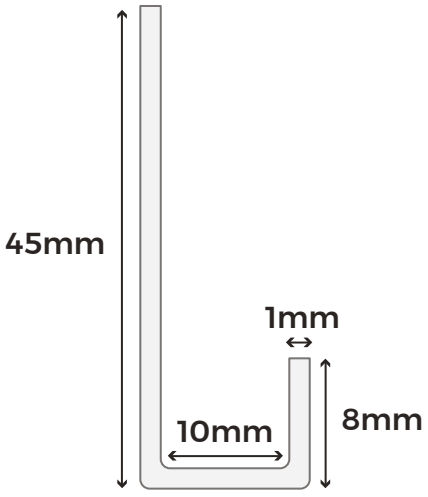

Please Note: Images are for illustration purposes only. Actual products may vary slightly from those shown.

BMF Excellence in building materials supply

www.cladco.co.uk
T: 01837 659901 **E:** info@cladco.co.uk

CLADCO PROFILES

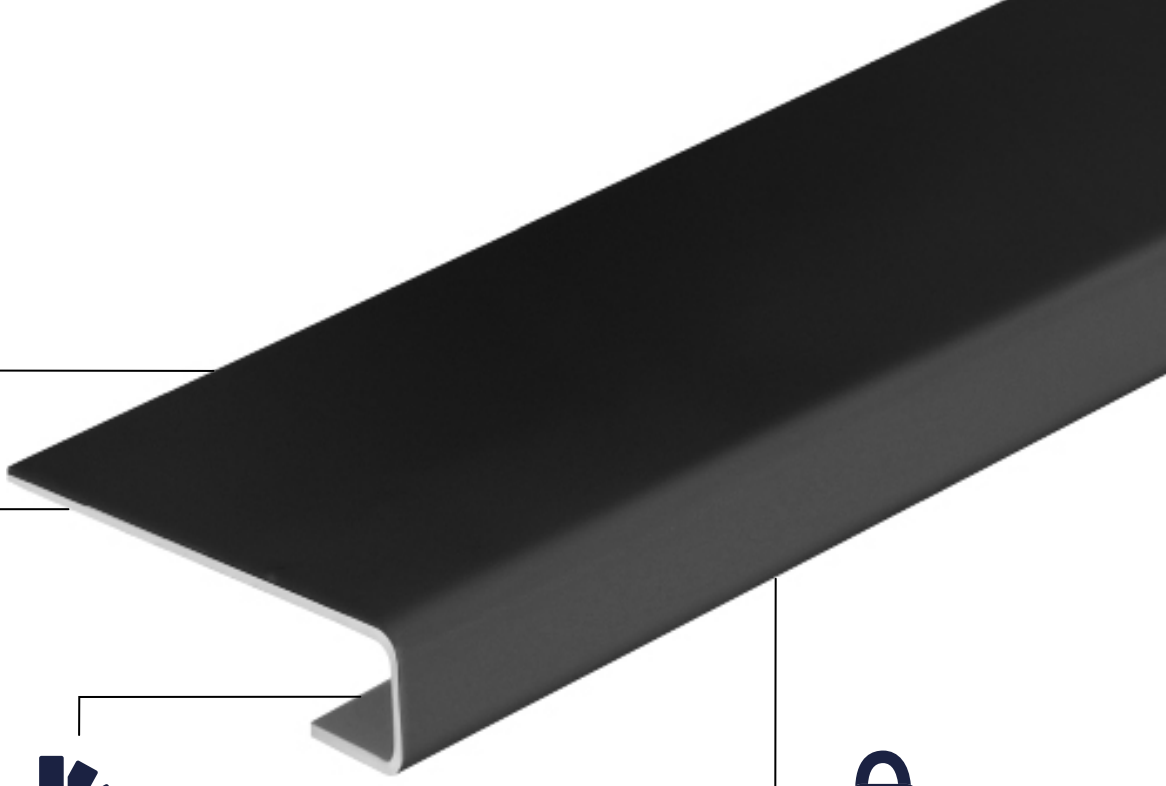

MATERIALS

Cladco trims are manufactured onsite using high-quality aluminium for a stain, rust and corrosion resistant product.

SURFACES

The aluminium surfaces are smooth and sleek, providing a refined, modern finish that enhances the overall aesthetic of your installation. This smooth finish also helps prevent dirt and grime buildup, making cleaning quick and easy.

ACCESSORIES

Complete your project with Cladco fibre cement cladding boards, aluminium trims and colour-matched screws.

LOW MAINTENANCE

The trim's flat aluminium surface is quick and easy to clean, helping maintain a neat, attractive finish alongside your fibre cement cladding boards.

INSTALLATION

Secure these trims to internal window or door corners using 39mm screws for a neat, stable fit.

EFFLORESCENCE IN FIBRE CEMENT

Efflorescence is a natural reaction in fibre cement products that can occur when moisture is present on the boards. To minimise this, we recommend storing boards indoors until they are ready for installation. Avoid installing boards while they are wet, as this increases the likelihood of efflorescence.

Ensure proper airflow behind the boards and along the perimeter of the cladding to allow sufficient ventilation. Please note that efflorescence deposits will eventually disappear as wind and rain naturally dissolve them.

AFTERCARE

To keep your fibre cement boards and aluminium trims in pristine condition, clean them periodically using lukewarm, soapy water with a soft cloth or brush. Always use a gentle detergent, and do not use high-pressure cleaning systems.

For marks or scratches that may accumulate over time or during installation, Cladco fibre cement touch-up paint can be used to restore the surface and maintain a flawless finish.

INSTALLATION ADVICE

Alongside the asymmetric external corner trims previously installed around windows and doors, secure connection profile trims to the internal corners of a window or door reveal using 39mm screws, as shown in the diagram. Make sure that the small painted edge of the connection profile trim sits neatly against the window or door frame.

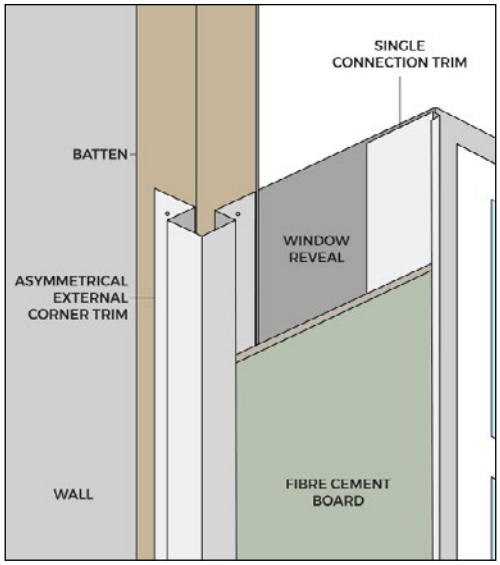

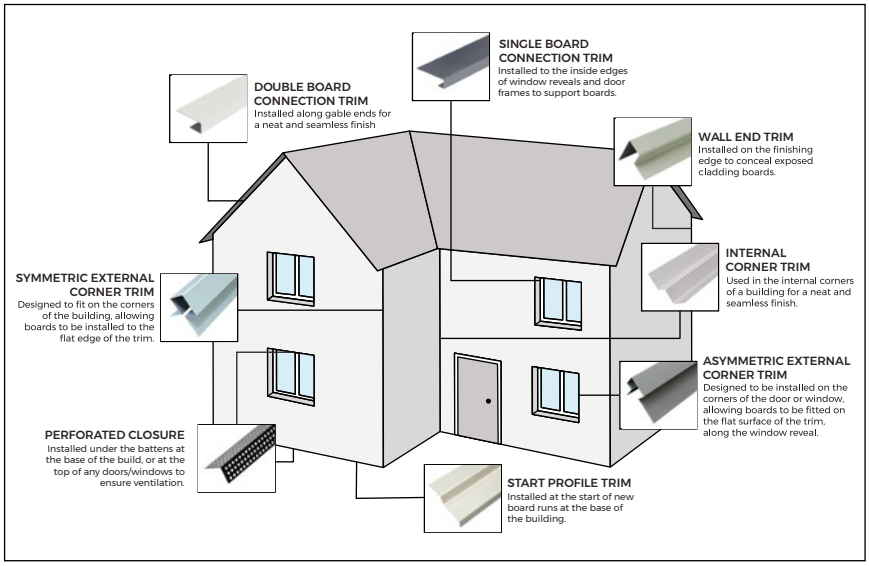

For detailed information about installation, please read our fibre cement lap installation guide.

IMPORTANT NOTICE

When working with fibre cement materials, it is essential to take proper care and follow necessary safety precautions. Cutting fibre cement boards releases fine dust into the air. While the mineral content itself is harmless, inhaling the dust can pose serious health risks.

To protect yourself, always wear a P3-rated respiratory protective mask when cutting fibre cement boards.

PRODUCT ACCESSORIES



PERFORATED CLOSURE

FIBRE CEMENT CLADDING BOARD



DOUBLE CONNECTION TRIM

START TRIM



SYMMETRIC INTERNAL CORNER TRIM

ASSYMETRIC EXTERNAL CORNER TRIM



WALL END TRIM

INTERNAL CORNER TRIM

BMF Excellence in building materials supply

www.cladco.co.uk

T: 01837 659901 **E:** info@cladco.co.uk

CLADCO PROFILES