

65MM HIDDEN DECK FASTENERS NORDECK RANGE



Secure your Nordeck woodgrain-effect decking boards with our premium hidden deck fasteners. Each fastener comes with colour-matched plugs to conceal screws beneath the deck surface, ensuring a clean, seamless finish. Supplied with durable 65mm deck screws and a Torx drill bit for easy installation.


PLUG COLOURS




SPECIFICATIONS

SKU	(Ash Grey) FIXHIDFASTSG (Chestnut) FIXHIDFASTCH (Cedar Wood) FIXHIDFASTT (Black) FIXHIDFASTBL (White) FIXHIDFASTWH (Ebony) FIXHIDFASTC (Silver Birch) FIXHIDFASTLG
Screw Size	M5 x 65mm
Plug Height	5mm
Plug Width	7mm (tapering to 6mm)
Pack Quantity	100 Plugs & Screws (With T20 Torx Drill Bit)

PLUG



SCREW



Please Note: Images are for illustration purposes only. Actual products may vary slightly from those shown.



MATERIALS

The screws are made from high-quality stainless steel, ensuring strength and long-lasting reliability.



SURFACES

Hidden deck fasteners offer a discreet and secure method to fix Nordeck decking boards to joists, creating a flawless, concealed finish.



ACCESSORIES

These fasteners are fully compatible with our Nordeck decking boards.



LOW MAINTENANCE

After securing the screws into the boards, simply tap in the colour-matched plugs to conceal the heads, allowing for quick and easy installation.




EASY TO USE

Once installed, the screws remain hidden and protected from the elements, reducing maintenance requirements and prolonging the lifespan of your decking.

INSTALLATION ADVICE


Secure one end of the board to the structural base using Cladco hidden deck fasteners, along with the supplied drill bit and plugs. Screws should be positioned 13mm from the edges of the board. Apply pressure with the drill bit to compress the orange pad on the board surface, creating space for the plug. Insert the supplied plug to achieve a flush, hidden finish that conceals the screw head.

Fix a row of 65mm screws with plugs along both sides of the board at regular intervals over the joists, maintaining the 13mm edge distance. Approximately 26 screws are recommended per 3.6m board. After installing each board, ensure they are properly aligned before continuing to complete the decking.

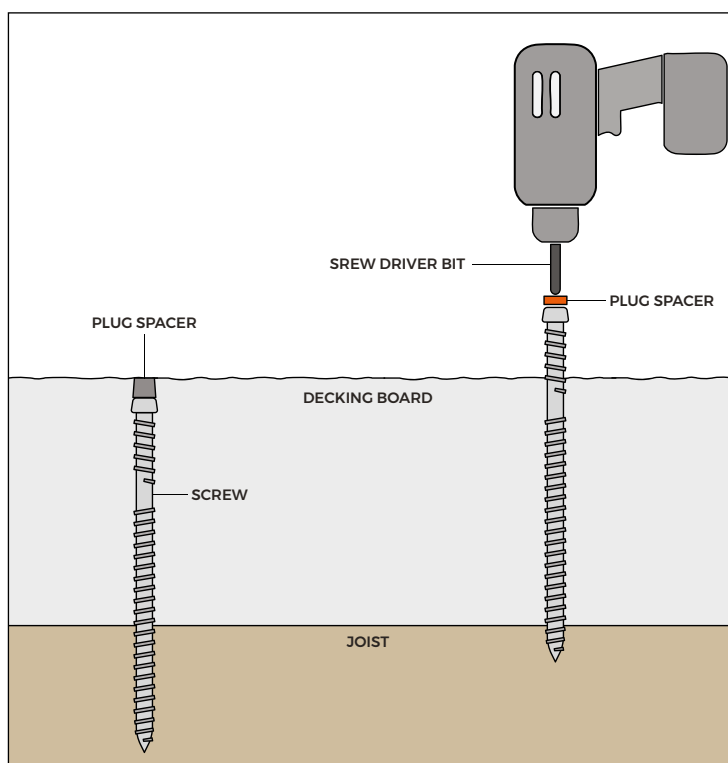


Please Note: To protect the woodgrain effect, we recommend using a rubber mallet to gently tap the colour plugs over the screw heads on your decking boards.

PRODUCT ACCESSORIES

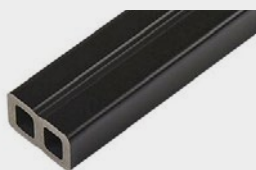

COMPOSITE JOISTS



RECYCLED
PLASTIC JOISTS



NORDECK DECKING
BOARDS



NORDECK BULLNOSE
BOARD



www.cladco.co.uk

T: 01837 659901 E: info@cladco.co.uk

CLADCO
PROFILES