



NORDIC RIDGE FLASHINGS STEEL SHEETING

For a roof apex that looks clean, consistent and professionally finished, our Nordic ridge flashing provides a wider, more decorative ridge detail suited to both traditional and modern buildings. Designed to bridge the junction where both roof slopes meet, it arrives pre-folded to 130° and can flex 10 to 15° each way to suit your pitch. Each 3m ridge includes a 5mm safety welt on both sides to increase rigidity and deliver a clean, uniform edge line.

AVAILABLE COATINGS



POLYESTER PAINT



PVC PLASTISOL



GREENCOAT® PURAL



GALVANISED

FLASHING SPECIFICATIONS

Length	3m
Available Thickness	0.7mm
Angle	130° Internal Angle
Size	195mm x 195mm
Coverage	190mm x 190mm
Colours	20 Across 3 Finishes

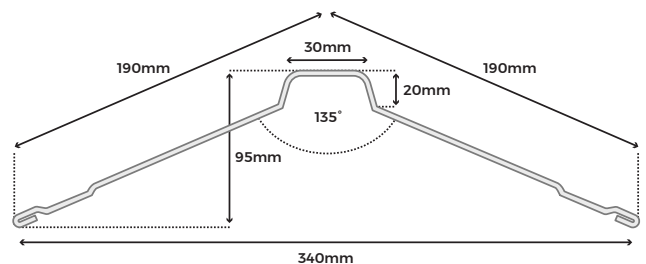


Illustration shown - welt detail may differ from the item supplied.

Please note: Images are for illustration purposes only. Actual products may vary slightly from those shown.



Safety Welt
Improves Edge
Strength



Custom
Flashing Options
Available



Flexes 10 to 15°
To Suit Roof
Pitch



Colours & Finishes
To Match Your Metal
Sheeting



MATERIALS

Manufactured from high-tensile, cold-rolled steel, coated for superior corrosion resistance and long-lasting protection. The coatings are oven-cured to ensure durability, providing resistance to abrasion and weathering.



SURFACES

Choose from PVC plastisol, polyester paint, GreenCoat® Pural BT, or galvanised finishes - each offering different levels of durability, protection, and visual appeal to suit your project.



ACCESSORIES

A full range of flashings, purlins, and fixings are available to match your sheets, ensuring a watertight, durable, and visually consistent finish.



LOW MAINTENANCE

Durable coated finishes require minimal upkeep, resisting weathering, dirt build-up, and corrosion for a long-lasting, low maintenance exterior solution.



LONGEVITY

PVC Plastisol: 15-25 years.
Polyester Paint: 8-12 years.
GreenCoat® Pural BT: Up to 40 years.
Galvanised: Up to 12 years.

Lifespan varies depending on installation environment and ongoing maintenance.



www.cladco.co.uk

T: 01837 659901 E: info@cladco.co.uk

CLADCO
PROFILES®

RIDGE FLASHING SKU

Coating and Colour	195mm x 195mm
Polyester Paint Coated, Juniper Green	RFBJGNORDIC
Polyester Paint Coated, Light Grey	RFBLGNORDIC
Polyester Paint Coated, Black	RFBBLNORDIC
Polyester Paint Coated, White	RFBWHNORDIC
Polyester Paint Coated, Slate Blue	RFBSBNORDIC
PVC Plastisol Coated, Juniper Green	RFAJGNORDIC
PVC Plastisol Coated, Goosewing Grey	RFAGGNORDIC
PVC Plastisol Coated, Black	RFABLNORDIC
PVC Plastisol Coated, Anthracite	RFAANNORDIC
PVC Plastisol Coated, Chestnut	RFACHNORDIC
PVC Plastisol Coated, Slate Blue	RFASBNORDIC
PVC Plastisol Coated, Vandyke Brown	RFABRNORDIC
PVC Plastisol Coated, Merlin Grey	RFAMGNORDIC
PVC Plastisol Coated, Moorland Green	RFAMONORDIC
PVC Plastisol Coated, Olive Green	RFAOGNORDIC
PVC Plastisol Coated, White	RFAWHNORDIC
GreenCoat® Pural BT, Nordic Night Black	RFMMBNORDIC
GreenCoat® Pural BT, Silver Fir Green	RFMFGNORDIC
GreenCoat® Pural BT, Slate Grey	RFMSLNORDIC
GreenCoat® Pural BT, Tile Red	RFMTRNORDIC
Galvanised	RFGNORDIC

MADE IN BRITAIN

Cladco is a proud member of Made in Britain—the official collective mark for UK manufacturers who meet strict criteria for domestic production.

As part of this trusted network, we are licensed to use the Made in Britain trademark across our materials, highlighting our ongoing commitment to UK-based manufacturing, quality, and traceability.

This mark is more than just a symbol—it represents a national movement to support sustainable British industry, protect consumers, and champion local businesses. Only verified members can display the registered trademark, offering confidence that our products bearing the mark are genuinely made in Great Britain or Northern Ireland.



CUSTOMER BENEFITS OF BUYING FROM A MADE IN BRITAIN MEMBER

Trusted Quality, Recognised Nationwide

We're licensed to use the official Made in Britain trademark—giving you confidence that our products meet strict UK manufacturing standards and quality benchmarks. When you see the mark, you know you're buying trusted, UK-made goods.

Supporting British Industry & Local Jobs


By choosing Cladco, you're supporting ethical manufacturing, UK-based jobs, and transparent, traceable supply chains. These values matter—not just to us, but to customers who care about where and how their products are made.

Easier to Find, Easier to Trust

We're listed in the official Made in Britain Member Directory with live contact info, location pin, and verified branding—making it easier for customers and trade partners to connect with a trusted UK supplier.

Products Built to Last

The Made in Britain mark is your reassurance that our products are built with care, comply with UK regulations, and are made to perform. It's a symbol of quality and durability you can rely on.

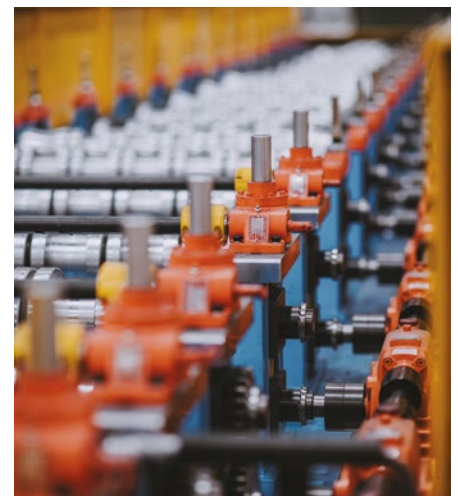

www.cladco.co.uk

T: 01837 659901 E: info@cladco.co.uk


CLADCO
PROFILES®

PVC PLASTISOL COATING - BUILT FOR PERFORMANCE

Our PVC plastisol-coated sheets are manufactured using a multi-layer system applied to zinc-coated, high-tensile steel and oven-cured for superior adhesion.

This process creates a tough, corrosion-resistant surface with excellent protection against the elements and strong resistance to wear and damage.

Available in a wide range of colours, plastisol coatings offer a practical, long-lasting solution that balances visual appeal with dependable performance.

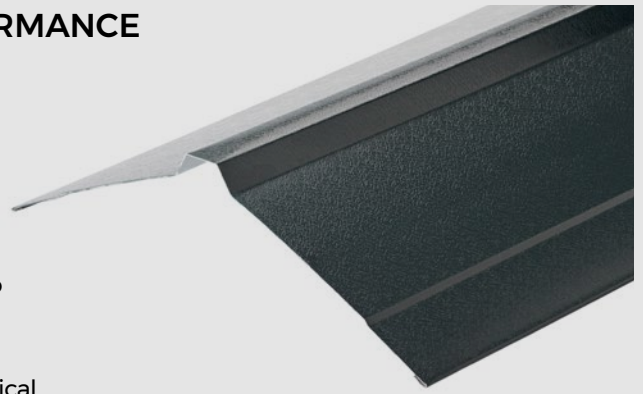

PVC PLASTISOL CHART

					
Anthracite RAL7016	Black BS00E53	Chestnut BS04C39	Goosewing Grey BS10A05	Slate Blue BS18B29	Vandyke Brown BS08B29
					
Merlin Grey BS18B25	Juniper Green BS12B29	Moorland Green S12B21	Olive Green BS12B27	White BS00E55	



QUALITY

Plastisol is applied to a hot-dipped 55% Aluzinc-coated steel substrate, offering excellent corrosion resistance and up to six times the durability of standard galvanised steel.



UV RESISTANCE

The plastisol coating is made from polyvinyl chloride-based thermoplastic resins with short molecular chains, offering enhanced UV resistance, making it particularly well-suited to construction and external applications.



HEAT RESISTANCE

Performs between -40°C and +80°C. The coating withstands expansion and contraction without compromising its finish.



DURABILITY

Embossed 200-micron coating offers excellent scratch resistance, ideal for demanding environments. The leather-grain texture helps hide minor scuffs, making it highly durable during handling and installation.



LONGEVITY

PVC plastisol-coated metal sheets typically provide 15-25 years of protection before requiring maintenance or repainting, with a total lifespan of over 30 years in standard environments.



www.cladco.co.uk

T: 01837 659901 E: info@cladco.co.uk

CLADCO
PROFILES®

PVC PLASTISOL PERFORMANCE OVERVIEW

POSCO C&C Plastisol - Long-Lasting Protection

POSCO C&C's plastisol coating offers superior performance compared to standard pre-painted finishes. With enhanced durability, excellent corrosion resistance, and advanced colour retention, it delivers long-term reliability in even the most demanding environments. Backed by a performance warranty of up to 30 years, it's a trusted choice for high-performance metal roofing and cladding applications.

- Key Features of POSCO C&C Plastisol-Coated Sheets
- 200µm abrasion-resistant topcoat for exceptional durability
- Leathergrain embossed finish for a refined, textured appearance
- Wide range of colours to suit various design requirements
- Aluzinc substrate for outstanding corrosion resistance
- 57µm reverse primer coat suitable for foam adhesion
- Excellent formability for complex profiles and shapes
- High colour stability for long-lasting visual appeal
- Suitable for low-pitch roofs – down to 1°
- Fire certified for added safety assurance

PVC Plastisol Coating Layers

TOPCOAT
PRIMER
PRE-TREATMENT
BASE METAL (STEEL)

	Test Results	Test Standards
Film Thickness	Ave. 200µm	EN 13523-1
Gloss (60°)	10-35%	EN 13523-2
Emboss	Leathergrain	
Abrasion resistance (CS-10, 1kg, 250rev)	10-15mg	EN 13523-16
Scatch resistance	> 5000g	EN 13523-12
Flexibility	T-Bend (OT, 16°C)	EN 13523-7
Reverse impact	18J	EN 13523-5
Salt Spray Resistance	1000 hours	EN 13523-8
Humidity Resistance	1500 hours	EN 13523-26
Internal Environment Classification	CPI5	EN 10169
Corrosion Resistance Category	RD5	EN 10169
UV Resistance Category	Ruv3	EN 10169
Fire Classification	C - s2, d0	EN 13051-1
Guarantee	Up to 30 years	

ALUZINC SUBSTRATE

- Plastisol is applied to a hot-dipped steel sheet coated with a 55% aluminium-zinc (aluzinc) alloy. This combination delivers exceptional long-term performance in harsh environments:
- Provides both the strong oxidisation resistance of aluminium and the sacrificial cathodic protection of zinc
- Offers 3 to 6 times the durability of standard galvanised steel in corrosive conditions
- Maintains excellent formability and structural integrity, even at bend points, due to minimal micro-cracking during forming

PVC PLASTISOL COATING (POSCO C&C)


- POSCO C&C's Plastisol Coating combines the protective benefits of thermoplastic resins with outstanding flexibility and weather resistance:
- The coating can elongate up to 300-400% without cracking, making it ideal for heavy forming and processing
- Formulated with short-chain polyvinyl chloride-based resins for enhanced UV stability and colour retention
- Multi-layer system applied to Aluzinc-coated high-tensile steel and oven-cured for maximum adhesion and strength
- Delivers superior corrosion resistance, chemical protection, abrasion resistance, and climatic durability

POLYESTER PAINT COATED – VERSATILE & COST-EFFECTIVE

Our 25-micron polyester paint finish offers a smooth, economical solution with reliable weather resistance and moderate scratch protection.

In standard environments, maintenance is typically required after 8-12 years, with an overall lifespan of 20+ years.

Available in a wide range of colours, this coating delivers a balance of performance and visual appeal. Polyester-coated sheets are supplied in corrugated, box profile, and flat sheet formats, and feature a light grey reverse coating for added protection during installation and use.

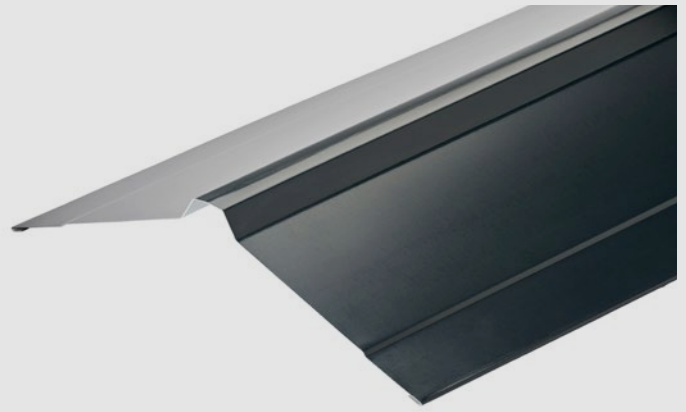

POLYESTER PAINT COATING CHART



QUALITY

This finish features a fine, smooth polyester coating, offering excellent weather resistance at an economical price point. Applied to quality galvanised steel, it provides a clean, uniform appearance and reliable performance.



UV RESISTANCE

Offers reliable UV protection for general outdoor applications, with colours remaining stable for several years. In typical UK conditions, the finish performs well, making it a practical choice in areas with moderate sun exposure.




HEAT RESISTANCE

Thermally stable from -40°C to +80°C, this coating resists blistering, peeling, and degradation in both high and low temperature conditions—ensuring reliable performance year-round.



DURABILITY

The 25-micron smooth polyester coating offers moderate scratch resistance and should be handled with care to prevent scuffs or surface marks—especially during transport and installation.

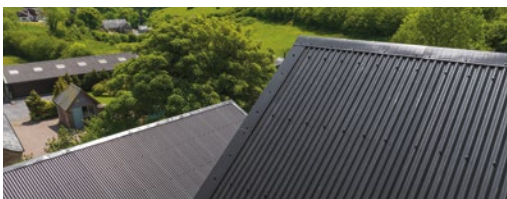

LONGEVITY

Provides 8-12 years of protection before maintenance is required, with an expected lifespan of 20+ years in standard UK environments.

GALVANISED – COST-EFFECTIVE PROTECTION WITH A CLASSIC FINISH


Cladco's galvanised roof sheets feature a protective zinc coating, offering a durable, low-maintenance, and economical solution for a wide range of applications.

With their traditional metallic appearance, galvanised finishes are ideal for agricultural and industrial projects where a coloured coating isn't required.

Available in box profile, corrugated, and flat sheet options, these sheets are suitable for use in roofing, flashings, weatherproofing, and internal lining of floors or walls.



GALVANISED COATING CHART



Galvanised



QUALITY

Manufactured from hot-dip galvanised steel with a 275g/m² zinc coating, this finish offers a durable, cost-effective, and low-maintenance solution with a classic metallic appearance.



UV RESISTANCE

Galvanised steel is inherently UV stable. While the bright metallic finish will naturally weather to a muted grey patina over time, it will not fade, peel, or deteriorate under sunlight—offering long-term reliability without the need for additional coatings.



HEAT RESISTANCE

Galvanised steel offers excellent thermal resilience. With no painted topcoat, there's nothing to degrade, blister, or peel—ensuring consistent performance in both high and low temperature conditions.



DURABILITY

The uncoated zinc finish provides moderate scratch resistance. While exposed areas are more susceptible to abrasion, minor scratches can self-heal over time through natural zinc oxidation, helping maintain protection in everyday use.



LONGEVITY

Galvanised sheets typically last up to 20 years, though they may require earlier maintenance than coated alternatives—particularly in harsh or coastal environments.

To prevent white rust, sheets should be stored in a dry, well-ventilated area. Prolonged exposure to trapped moisture can result in a milky or chalky surface appearance, affecting aesthetics but not structural performance.



www.cladco.co.uk


T: 01837 659901 E: info@cladco.co.uk

CLADCO
PROFILES®

GREENCOAT® PURAL BT - CHOICE OF COATINGS

GreenCoat® Pural BT is a premium 0.7mm roofing finish offering outstanding resistance to UV, corrosion, and weathering. With excellent scratch resistance and formability—even down to -15°C—it supports year-round installation with ease.

This durable, bio-based coating is available in a range of attractive colours, including silver fir green and slate grey, allowing you to create a roof that complements its surroundings while delivering long-lasting performance.

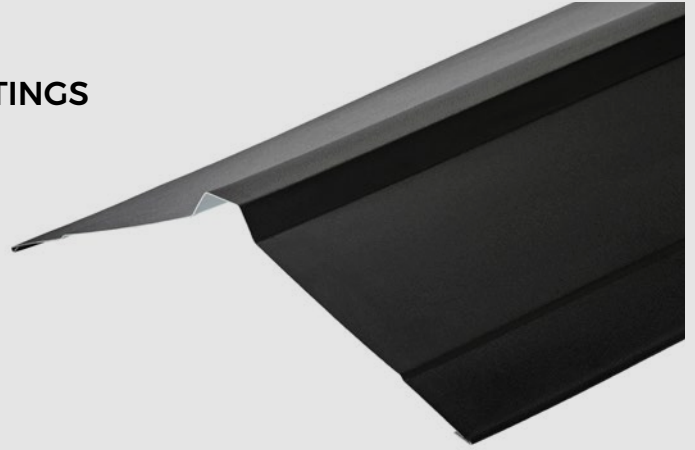

GREENCOAT® PURAL BT COATING CHART

			
Tile Red RAL8004	Nordic Night Black RAL9005	Silver Fir Green RAL6021	Slate Grey RAL7016



QUALITY

Is a premium Swedish steel finish using bio-based technology. Offers excellent durability, corrosion protection and a low-gloss, tile-like appearance.



UV RESISTANCE

Highly UV-resistant. Maintains colour and surface integrity with minimal fading or chalking.



HEAT RESISTANCE

Performs well in hot or cold climates. Coating remains stable under sustained temperature extremes.



DURABILITY

Pural BT offers high levels of durability with a robust matte finish. The bio-based coating resists mechanical wear and scratching better than standard polyester paint.



LONGEVITY

Low-maintenance coating with a service life exceeding 40 years. Often outlasts plastisol in long-term performance.



www.cladco.co.uk

T: 01837 659901 E: info@cladco.co.uk

CLADCO
PROFILES®

GREENCOAT® PURAL BT - TECHNICAL OVERVIEW

GreenCoat® Pural BT is a premium, bio-based coated steel designed for superior performance in roofing and cladding applications. Manufactured to EN 10169 standards and fully chromate-free, this coating uses Swedish rapeseed oil and other renewable raw materials to deliver exceptional sustainability alongside durability.

This high-performance steel provides RC5+ corrosion resistance, RUV5 UV protection (Matt), and a fire classification of A1 s1 d0, making it ideal for projects demanding long-term reliability. Its excellent scratch resistance (up to 40N) and ability to fold at temperatures down to -15°C ensures easier, year-round installation.

The newly developed Satin finish offers a contemporary look (gloss 20) while maintaining the same strength and weather resistance as the Matt, Metallic, and Regular ranges.



KEY TECHNICAL PROPERTIES

Property	Matt	Metallic	Satin	Regular
Gloss Level	<5	40	20	40
Corrosion Resistance	RC5+	RC5+	RC5+	RC5+
UV Resistance	RUV5	RUV4	RUV4-5	RUV4
Fire Classification (EN13501-1)	A1 s1 d0	A1 s1 d0	A1 s1 d0	A1 s1 d0
Scratch Resistance	40N	35N	40N	40N
Lowest Forming Temperature	-15°C	-15°C	-15°C	-15°C
Coating Thickness	50µm	45µm	50µm	50µm
Steel Grades	S280GD, S320GD, S350GD, DX51D			
Zinc Coating	275 g/m ²			
Available Widths	1000-1500mm (Metallic max 1420mm)			



Reverse Side Coating

Two-layer grey coating for improved corrosion protection and adhesion.



Protective Film

Optional film for installation protection; remove within six months of manufacture or one month post-installation.



Sustainability



Manufactured with bio-based technology, reducing environmental impact without compromising performance.

STANDARD FLASHINGS


Flashings play a vital role in sealing corners, edges, joints, and other vulnerable areas, helping to prevent water ingress and enhance the finished look of your roof. From ridges to eaves, our steel flashings are available in a variety of styles, finishes, and colours to match your roofing sheets—delivering both protection and a professional appearance.

- Seals corners, edges, and junctions
- Helps prevent leaks and water damage
- Available in multiple colours to complement your sheets.

For bespoke solutions, see our Custom-Made Flashings range.

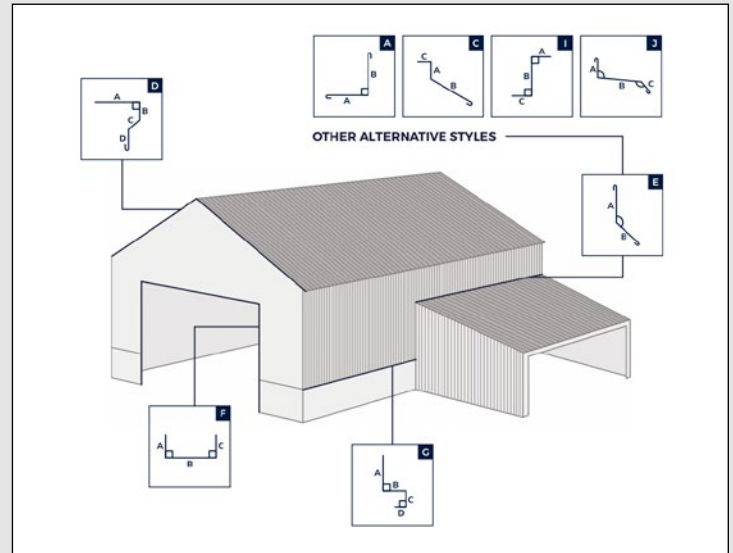

NORDIC RIDGE




STANDARD RIDGE



DRIPTRAY FLASHING



BARGE FLASHING




ABUTMENT FLASHING

CUSTOM-MADE FLASHINGS

For non-standard roof designs or unique architectural details, custom flashings provide a precise, watertight finish tailored to your project.

Manufactured from durable 0.7mm flat sheet, Cladco's bespoke flashings are made to your exact specifications—up to 1200mm wide and 3m in length.

- Fabricated to your specified angles and sizes
- Available in a range of coatings and colours
- Simply provide dimensions using our lettered diagram
- A made-to-measure flashing ensures the best fit, protection, and finish—designed with your build in mind.

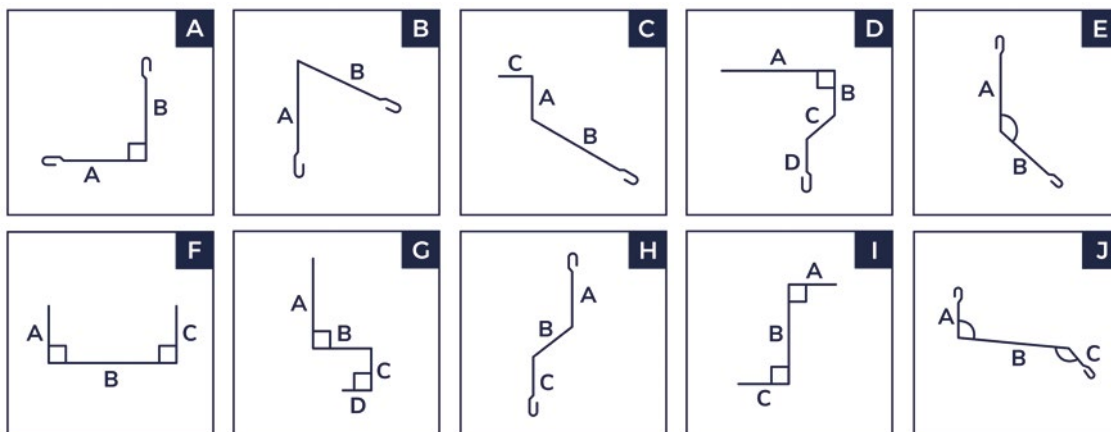


INSTALLATION GUIDES

Correct installation is key to a long-lasting, weather-resistant finish. Our easy-to-follow guides walk you through each step—from sheet alignment and fixing methods to correct flashing placement.

Whether you're a first-time DIYer or a seasoned tradesperson, our Help & Advice section provides the confidence and clarity you need to complete your project properly.

Scan the QR codes below to access:

- [Roofing Sheet Installation Guide](#)
- [Flashings Installation Guide](#)
- [Roofing Help & Advice](#)

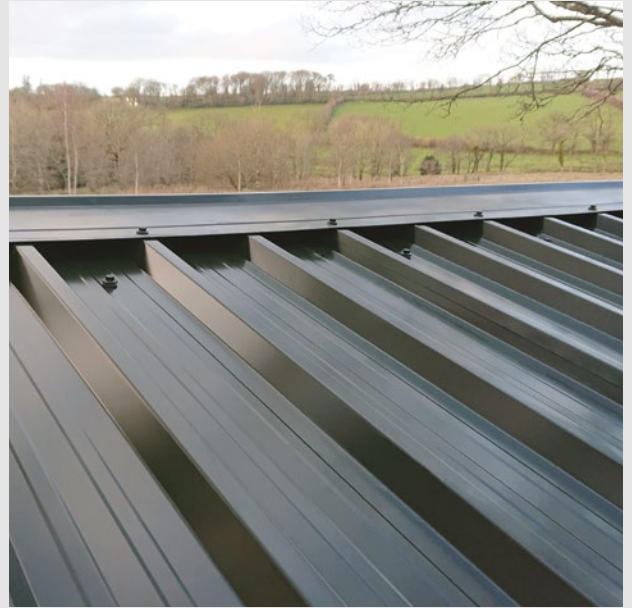

[FLASHING
INSTALLATION
GUIDE](#)



[CUSTOM
FLASHINGS
PAGE](#)



[ROOFING
HELP AND
ADVICE](#)

PRODUCT ACCESSORIES



SAFETY
GLOVES



MASTIC
LAPPING TAPE



STITCHING
SCREWS



COLOUR
CAPS



CLADCO
ADHESIVE
SEALANT