


PURAL TOUCH-UP PAINT

ROOFING ACCESSORIES



Pural BT touch-up paint (250ml) is ideal for small, localised repairs to GreenCoat® Pural BT-coated sheets, concealing scratches and exposed edges. Available in four colour-matched finishes—tile red, nordic night black, slate grey, and silver fir green—it's an easy and effective way to maintain a professional finish.

COLOUR RANGE

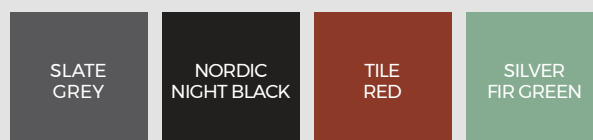

SPECIFICATIONS

SKU	(Slate Grey) RPAINTMSL (Nordic Night Black) RPAINTMBL (Tile Red) RPAINTMTR (Silver Fir Green) RPAINTMFG
Size	250ml
Weight	300g



STORAGE & HANDLING

The paint is manufactured in the EU and classified as non-hazardous, making it safe and straightforward to handle and store. Ensure the lid is securely resealed after each use. Store the tin in a cool, dry environment to prevent the paint from drying out.

Please Note: this touch-up paint is designed for small, localised repairs only. It should not be used for large-scale surface painting.



www.cladco.co.uk
T: 01837 659901 E: info@cladco.co.uk

CLADCO
PROFILES



Blends Perfectly With
Cladco's GreenCoat® Pural
BT-Coated Products



Easy-To Apply



Non-Hazardous Formula



MATERIALS

Made with non-hazardous, EU-manufactured ingredients for safe and reliable use.



SURFACES

Designed to blend with GreenCoat® Pural BT-coated sheets, the colour-matched finish restores a smooth,



ACCESSORIES

Available in four colour-matched finishes, this paint is fully compatible with Cladco GreenCoat® Pural BT standing seam, tile form, and flat sheets.



INSTALLATION

This paint is easy to apply with a standard brush. The wide tin opening accommodates various brush sizes, ensuring straightforward, mess-free application.



LONG-LASTING

Offers lasting protection for exposed edges and minor surface marks, helping preserve the appearance and durability of your installation.

INSTALLATION ADVICE

General Guidelines:

- Apply only where needed – touch-up paint may age/fade differently to factory finishes
- Apply two coats, with a total dry film thickness of 60 µm (i.e. 2 coats of 80 µm wet film)
- Paint in conditions above +8°C and below 75% humidity
- Ensure all surfaces are clean, dry, and free of grease or loose paint before application

NOTE: Always ensure a good colour match before application. Not suitable for large surface areas or full recoating.

For Scratches Up to 50mm Wide:

- Remove any loose or flaking paint
- Clean the area thoroughly
- Use a soft brush or paint pen to apply paint directly to the scratch
- Choose a brush that matches the width of the damage for minimal overlap

For Areas Over 50mm Wide:

- Remove loose paint and clean the area
- Prime using a rust inhibiting primer with a soft brush.
- Once dry, apply Pural BT touch-up paint as a topcoat with minimal overlap

PRODUCT ACCESSORIES



STANDING SEAM
SHEETS



22MM STITCHER
SCREWS



32MM MOULDED
HEAD SCREWS



SAFETY
GLOVES



www.cladco.co.uk

T: 01837 659901 E: info@cladco.co.uk

CLADCO
PROFILES