

BOX PROFILE 32/1000

Rooflight sheet



Use with our 32/1000 Box Profile sheet or on their own, these translucent lightweight GRP roof lights let in diffused daylight at an 80% transmission rate. With a width and profile to match that of our Box Profile 32/1000 sheet, these translucent roof panels will perfectly match. Available in a range of lengths, their resin enriched gel coat finish protects against the effects of UV radiation.


Measurements of 32/1000 Translucent Roof Panels:

GRP Rooflights can be incorporated into the roof design, these can be placed in different areas of the roof where light is required. If rooflights are between metal sheets, remember to overlap the sheets by 250mm over a purlin. Please note, it is recommended you should not have more than 2 rooflights side by side before a metal sheet is used. This will help keep the roof as strong as possible.

Benefits of 32/1000 GRP Roof Lights:

- Natural daylight with weather protection offering long maintenance-free life
- Economic GRP roof lights sheeting in a robust profile will withstand high winds and hailstones
- Stocked in lengths of 2.5m, 3m, 3.5m, 4m, 4.5m & 5m.
- Independently tested to current CE EN 14782 requirements.

SPECIFICATIONS	
Applications	Wall or Roof (Vertical or Horizontal)
External Finish	Translucent GRP glass fibre
Internal Finish	Translucent GRP glass fibre
External Face	Profiled 32/1000
Standard Width	1000mm when lapped
Available Length	2.5m, 3m, 3.5m, 4m, 4.5m & 5m lengths
Minimum Pitch	4 degrees
Gauge Thickness	1.5mm
Weight	2.6kg/m ² approximately

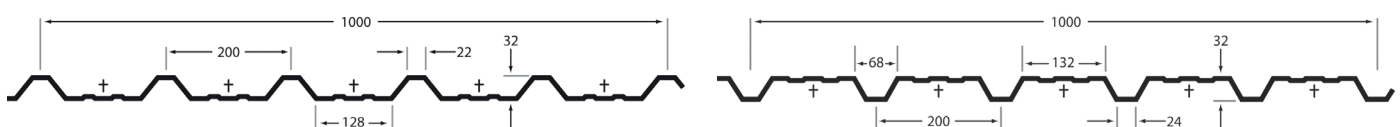

PLEASE NOTE - Extra care should always be taken when handling metal sheets and flashings we advise using the correct type of Glove when handling or moving metal sheets and flashings.



01837 659901 info@cladco.co.uk
www.cladco.co.uk

Beardown Road, Exeter Road Industrial Estate, Okehampton EX20 1UA