

TRADE EXCLUSIVE

# VERSADECK BULLNOSE/STARTER CLIPS (PACK OF 50)



Cladco VersaDeck starter/bullnose clips help to create an accurate installation of your VersaDeck composite decking boards when being secured against a wall or fence. They provide peace of mind that the area is correctly fitted from the first to the last board, and will help ease the installation process by reducing the need to make changes and alter the position of the boards.



MANUFACTURED FROM  
STAINLESS STEEL FOR A  
DURABLE RESULT





RESISTANT TO  
CORROSION



EASY  
INSTALLATION

## STARTER CLIP SPECIFICATIONS

SKU	FIXWPCSCEV
Length	27mm
Height	10mm
Material	Stainless Steel

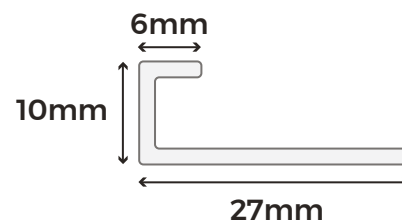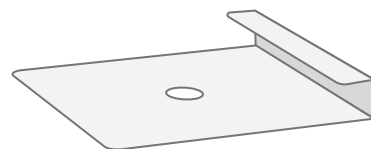

**Please Note:** Images are for illustration purposes only. Actual products may vary slightly from those shown.



## MATERIALS

The VersaDeck starter/bullnose clips are made from stainless steel to provide stable fixing for your VersaDeck composite decking.



## SURFACES

These starter/bullnose clips ensure that the surface of your VersaDeck composite decking is stable and level.



## ACCESSORIES

Can be used alongside the VersaDeck T-clips and screws to create a secure and sturdy deck.



## LOW MAINTENANCE

The stainless steel materials means that the starter clips are resistant to corrosion which minimises maintenance.



## LONG-LASTING

These starter/bullnose clips are resistant to water and corrosion, making them a long-lasting addition to the stability of your VersaDeck composite decking area.

### Starter Clips




VersaDeck starter/bullnose clips need to be fixed to the end of the joists before laying the first board, leaving a gap of at least 10mm between any walls and the starter clip.

### Expansion Gap

Do not allow VersaDeck capped composite boards to meet at the ends. T-clips will leave a 7mm expansion gap between each board to allow for expansion and contraction in temperature changes. It is not recommended that boards are installed in temperatures below 5°C.

### Last Boards

For the final two boards, measure the width of both boards together (including the 7mm expansion gap) to discover where the outer edge of the final board will lie and mark out with a pencil on the below joists. Use this mark to fit the final starter/bullnose clips and slot the last board into place using these clips.

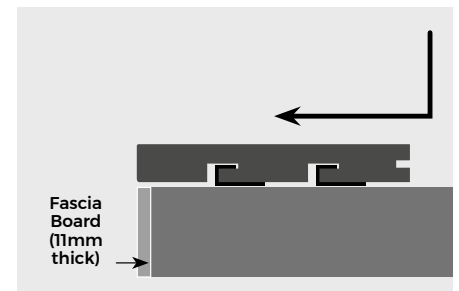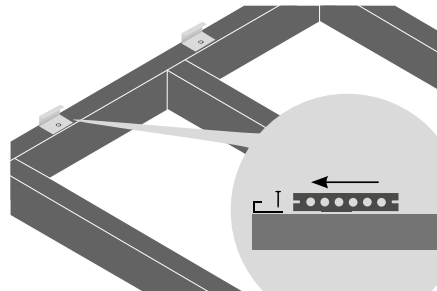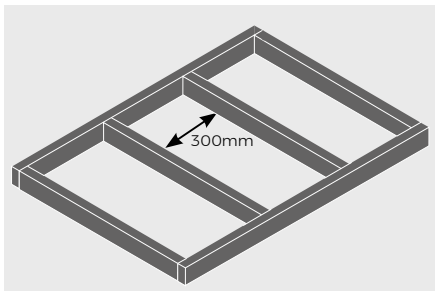

Adhering to these guidelines will help ensure proper installation and longevity of your VersaDeck composite decking. Failure to follow these guidelines will invalidate the product warranty.

## PRODUCT ACCESSORIES



**VERSADECK  
BULLNOSE BOARDS**




**VERSADECK  
FASCIA BOARDS**



**VERSADECK  
DECKING BOARDS**



**VERSADECK  
T-CLIPS**



**RECYCLED  
PLASTIC JOISTS**



[www.cladco.co.uk](http://www.cladco.co.uk)

**T:** 01837 659901 **E:** [info@cladco.co.uk](mailto:info@cladco.co.uk)

**CLADCO**  
PROFILES